

Hot water throughout life



Huge Savings
 on Electricity Bills

**MNRE
 APPROVED**



Solar Water Heater

Ceramica Series - CR P

Freedom series - FRM

Turbo Series - TB D

Jumbo Series - JM & JM P



Features:

- Safe water for cooking purpose
- Evacuated tube with 3 layer (Cu-SS-Al=N/Al)
- World's most reliable welding technology
- High thermal efficiency
- Claim 80% depreciation
- Hot water in 2 hours

Applications:

- Home and other domestic application
- Flats and Apartments
- Hostels, Hospitals and Hotels
- Milk Dairies & Textile Industries
- Boiler feed hot water
- Laundry applications

Help line: 90 20 121 121 www.hykonindia.com ho@hykonindia.com

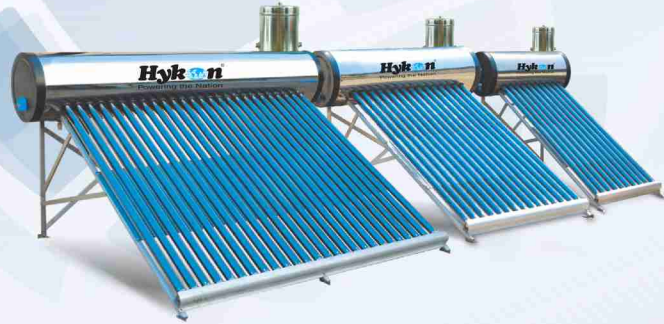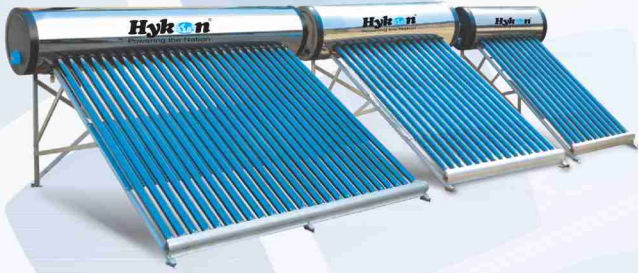

Ceramica Series-CRP

Capacity: 100LPD | 160LPD | 200LPD | 260LPD

- Ideal for hard water areas (Up to 2000 PPM)
- Inner tank - Single moulded Polymer (Thi. 5mm)
- Outer tank - Stainless steel (SS 430)
- Stand parts - Aluminium (No corrosion)
- Maximum Water Head - 3.5 mtrs.

Turbo Series-TB D

Capacity: 100LPD | 150LPD | 200LPD

- Ideal for Pressure pump application (10bar. Pressure)
- Inner tank - Stainless steel (SS 316)
- Outer tank - Stainless steel (SS 430)
- Stand parts - Aluminium (No corrosion)

Freedom Series-FRM

Capacity: 60LPD | 100LPD | 150LPD | 200LPD

- Ideal for soft water areas (less than 140ppm)
- Inner tank - Stainless steel (SS 304 L-Food Grade)
- Outer tank - Pre-painted Galvalume (PPGL/PPGI)
- Stand parts - Aluminium (No corrosion)
- Maximum Water Head - 3.5 mtrs.

Jumbo CR Series- JM & JM P

Capacity: 500LPD to 50 K LPD

- Ideal for Hotels / Institutions / Hostels
- Inner tank - HR Steel with epoxy coating
- Outer cladding - Stainless steel


Annual Savings on Electricity Bills (Sample Chart)

Electricity consumed for heating 100 liters of water in a 25 Lit. electric water heater	4.65* Elect. Unit/day (approx.)
4.65* x 300 (sunshine days)	1395 Elect. Unit
1395 x 6.5* (rate/unit)	9068 (approx.)

*No. of units saved will depend on the usage. *(approximate)

Specifications

Model	A	B	C	D	Height	Area M ²
CRP 100 LPD	1870	865	NA	NA	1360	1.62
CRP 160 LPD	1870	1360	680	680	1360	2.92
CRP 200 LPD	1870	1700	850	850	1360	3.18
CRP 260 LPD	1870	2210	1105	1105	1360	4.13
TB 100 LPD	1890	865	NA	NA	1360	1.63
TB 150 LPD	1890	1280	NA	NA	1360	2.42
TB 200 LPD	1890	1700	850	850	1360	3.21
SL 60 LPD	1870	462	NA	NA	1360	0.86
FRM 100	2145	690	NA	NA	1460	1.48
FRM 150	2145	1020	NA	NA	1460	2.19
FRM 200	2145	1280	NA	NA	1460	2.75
500 LPD Coll.	1900	3800	1900	1900	1340	7.22

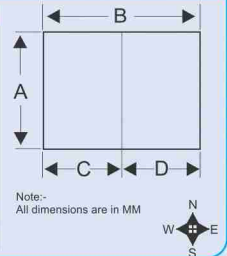

Help line : 90 20 121 121

Hykon India (P) Ltd. www.hykonindia.com ho@hykonindia.com



www.facebook.com/hykonindia/

Dealer Name

Home UPS

Tubular Battery

Solar Power Plant

Solar Street Light

Online UPS

Servo Stabilizer